


E-Mail Konto anpassen → Outlook 2016: POP

Die nachstehende Anleitung kann auch für andere Outlook-Versionen benutzt werden, wie zum Beispiel Outlook 2010, 2013 und 2016. Die Reihenfolge der einzelnen Schritte können abweichend sein.


1. Öffnen Sie das Mail-Programm Outlook 2016 auf Ihrem Computer/PC.




2. Wählen Sie oben das Registerblatt «Datei» aus.

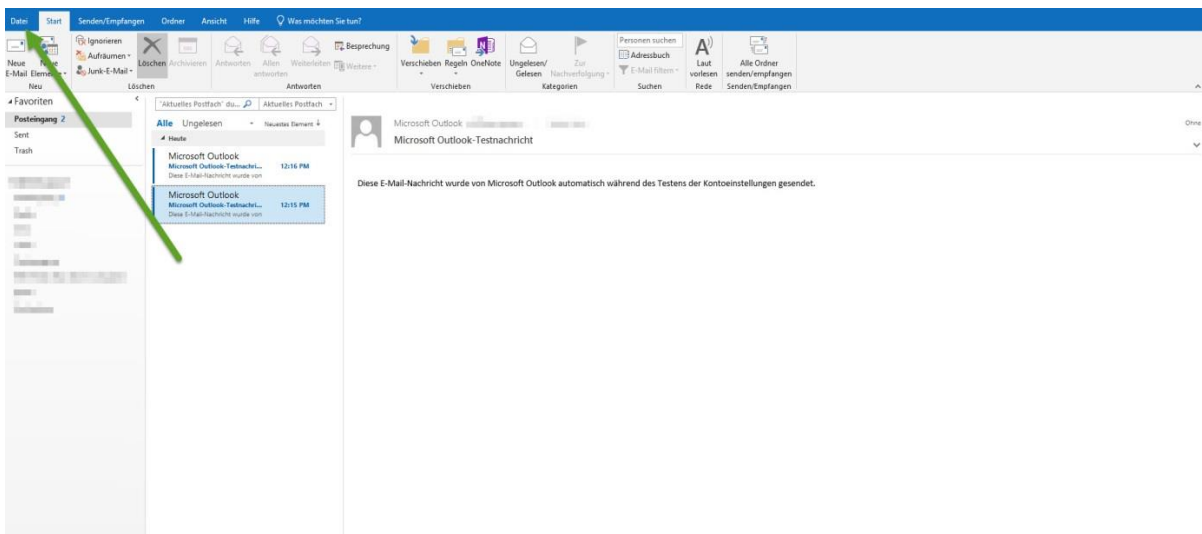


3. Sie können nun unter «Kontoeinstellungen» erneut auf «Kontoeinstellungen» klicken um Ihr Mail-Profil zu sehen.

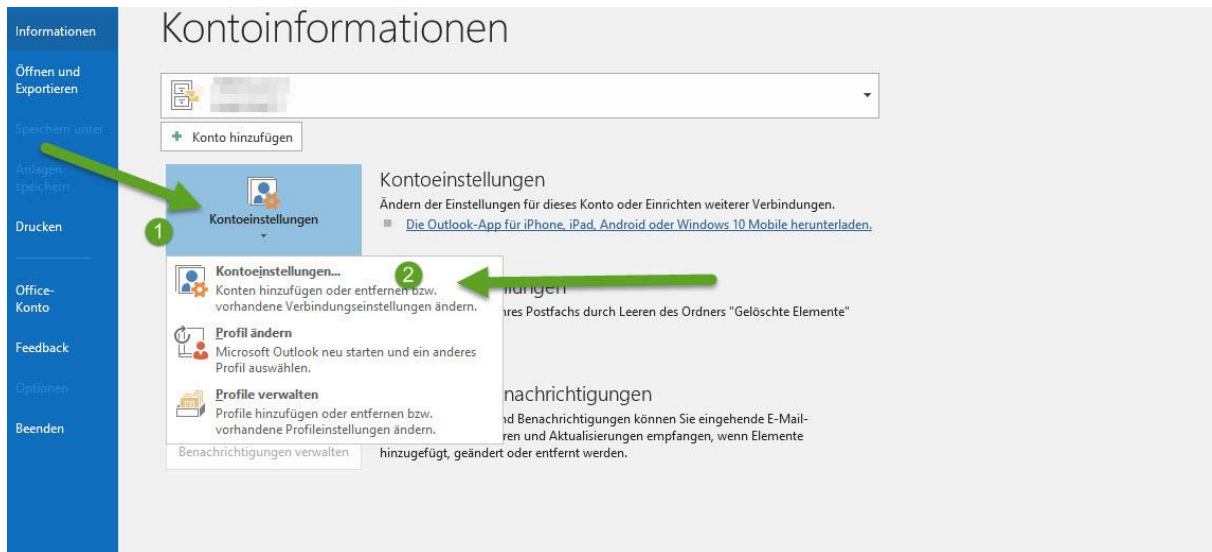

4. Wählen Sie «Reparieren...»

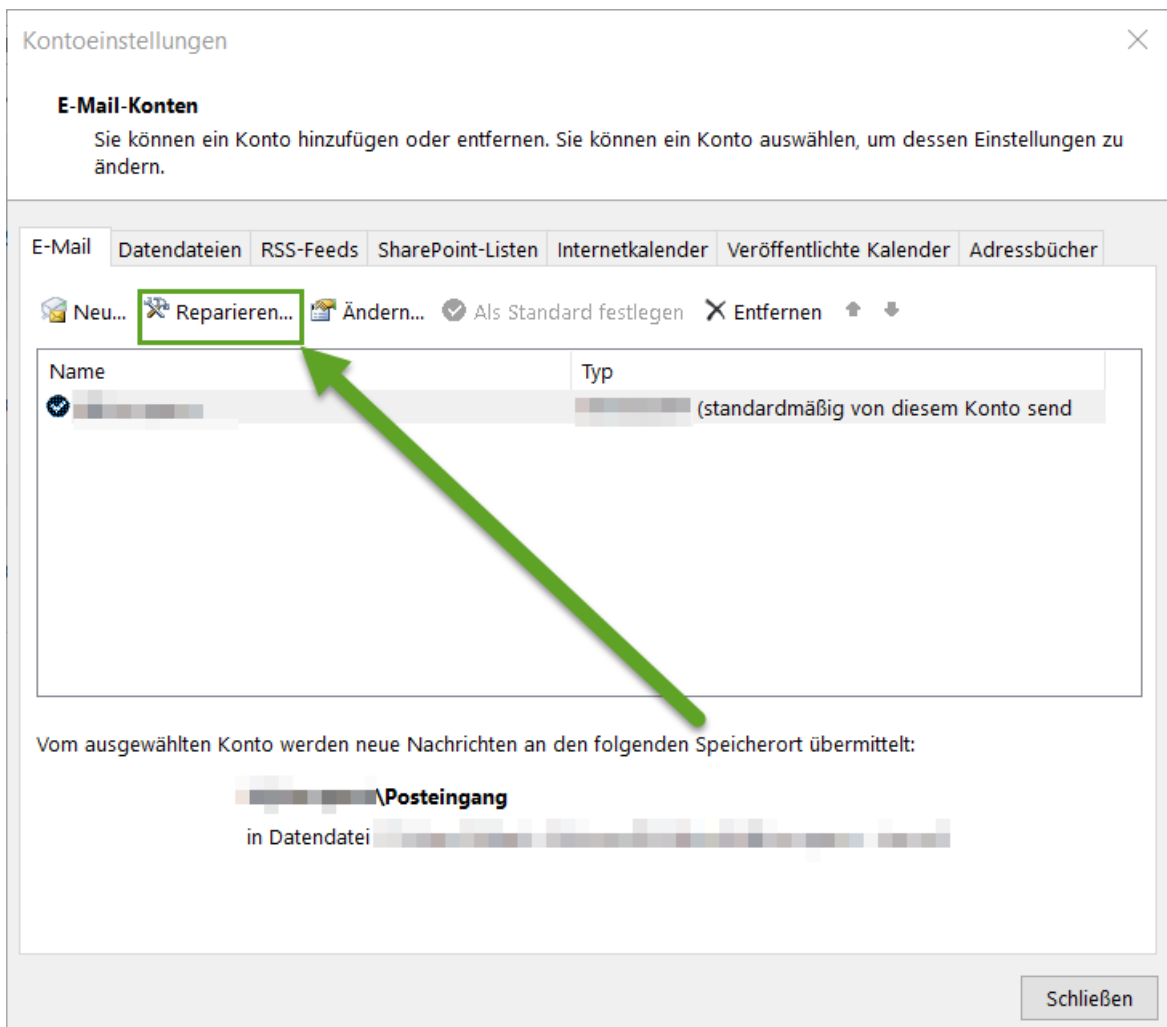

5. Um mit den Einstellungen fortzufahren, befolgen Sie die folgenden Schritte.
- 1) Klick auf Erweiterte Optionen
 - 2) «Ich möchte mein Konto manuell reparieren» aktivieren
 - 3) «Reparieren» klicken

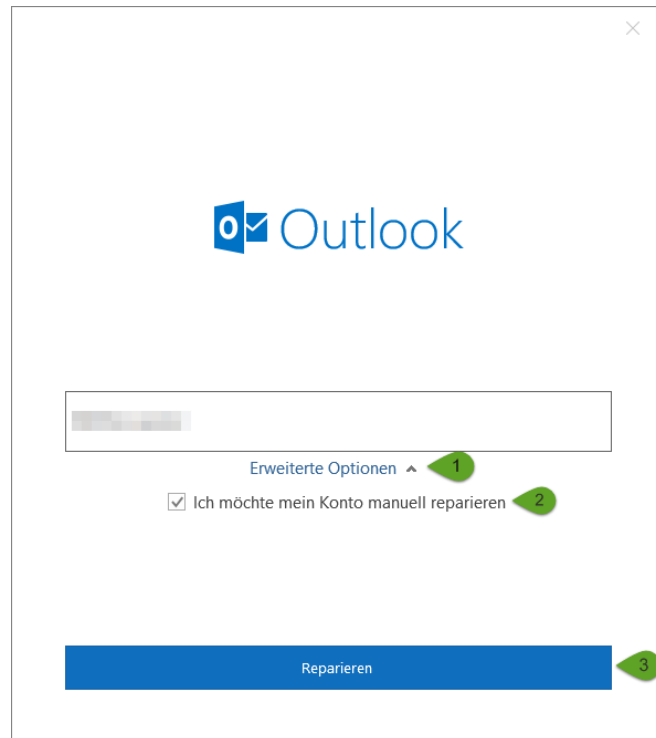

6. Hier müssen Sie den Posteingangsserver neu definieren. Es ist möglich, dass Sie aktuell eine andere Konfiguration verwenden. Wir bitten Sie in diesem Fall die Einstellungen wie unten abgebildet neu einzurichten.

- 1) Benutzername: Ihre E-Mailadresse
- 2) Kennwort: Ihr Passwort
- 3) Server: von pop.mail-ch.ch (oder pop.Ihrdomain.xy) auf pop.hosting-ch.ch Port 995
- 4) Server erfordert eine verschlüsselte Verbindung (SSL/TLS) aktivieren

Klappen Sie «Ausgehende E-Mail» auf

The screenshot shows the 'Eingehende E-Mail' configuration page. It includes fields for 'Benutzername', 'Kennwort', 'Server', and 'Port'. The 'Server' field is set to 'pop.mail-ch.ch' and the 'Port' is '995'. There are four green callouts: '1' points to the username field, '2' to the password field, '3' to the server and port fields, and '4' to the 'Server erfordert eine verschlüsselte Verbindung (SSL/TLS)' checkbox, which is checked. Below the 'Ausgehende E-Mail' section, there is a green cloud with the word 'ALT' inside. At the bottom, there are 'Zurück' and 'Reparieren' buttons.

The screenshot shows the 'Eingehende E-Mail' configuration page with the same fields as the previous one, but the 'Server' field is now set to 'pop.hosting-ch.ch'. The 'Server erfordert eine verschlüsselte Verbindung (SSL/TLS)' checkbox is still checked. There are four green callouts: '1' points to the username field, '2' to the password field, '3' to the server and port fields, and '4' to the 'Server erfordert eine verschlüsselte Verbindung (SSL/TLS)' checkbox. Below the 'Ausgehende E-Mail' section, there is a green cloud with the word 'NEU' inside. A green arrow points from the 'NEU' cloud to the 'Reparieren' button. At the bottom, there are 'Zurück' and 'Reparieren' buttons.

7. Nun können Sie den Postausgangsserver definieren. Es ist möglich, dass Sie aktuell eine andere Konfiguration verwenden. Wir bitten Sie auch in diesem Fall die Einstellungen wie unten abgebildet neu einzurichten.

1) Server: von smtp.mail-ch.ch (oder smtp.lhrdomain.xy) auf smtp.hosting-ch.ch
Port 587

2) Verschlüsselungsmethode: STARTTLS

Danach Bestätigen Sie mit dem Button «OK»

The screenshot shows the 'Ausgehende E-Mail' configuration page. The 'Server' field contains 'smtp.mail-ch.ch' and the 'Port' field contains '587'. A green arrow labeled '1' points to the port field. The 'Verschlüsselungsmethode' dropdown is set to 'STARTTLS', with a green arrow labeled '2' pointing to it. Below these fields, there are checkboxes for authentication: 'Anmeldung mithilfe der gesicherten Kennwortauthentifizierung (SPA) erforderlich' (unchecked) and 'Mein Postausgangsserver (SMTP) erfordert Authentifizierung' (checked). Under the second checked option, there are two radio buttons: 'Gleiche Einstellungen wie für Posteingangsserver verwenden' (selected) and 'Mit Benutzername und Kennwort anmelden' (unchecked). A green cloud-shaped callout with the word 'ALT' is positioned to the right of the radio buttons. At the bottom, there is a blue 'Reparieren' button and a 'Zurück' link.

This screenshot is identical to the one above but with updated settings. The 'Server' field now contains 'smtp.hosting-ch.ch' and the 'Verschlüsselungsmethode' dropdown is set to 'Automatisch'. A green arrow labeled '1' points to the port field, and a green arrow labeled '2' points to the 'Automatisch' dropdown. A green cloud-shaped callout with the word 'NEU' is positioned above the radio buttons. A green arrow points from the 'NEU' callout to the blue 'Reparieren' button at the bottom right. The 'Zurück' link remains on the bottom left.

8. Alle Einstellungen sind nun abgeschlossen. Klicken Sie auf «Vorgang abgeschlossen» um die Konfiguration abzuschliessen. Starten Sie das Outlook-Programm erneut, um die Mail-Funktionalität zu nutzen.

